


RRAS-SVC/A11

Sound volume control unit

- **Communication over RS485**
- **Two buttons control**
- **Indication of selected level via LEDs**
- **Power supply 24 V**
- **Mounting into panel**
- **Design according to EN 50155:2007**

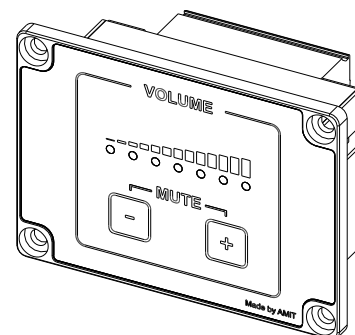


TECHNICAL DATA

Communication	RS485
Galvanic isolation	YES
Line termination	120 Ω, internal
Connection point	WAGO 231-340/001-000
Buttons	2x
Lifetime	10 ⁶ strokes
Buttons contour backlight	Yes, adjustable intensity
Indication	7 x LED, green
Others	
Front panel	Alluminium + foil
– Rear cover	Formed metal 1 mm
Ingress protection rate	
Front panel	IP65
Rear cover	IP30
Operating temperature range	-40 °C to + 70 °C
Storage temperature range	-40 °C to 70 °C
Maximum ambient humidity	< 95 % non-condensing
Mounting	4 × M4 bolt with cylindric head
Weight	0.24 kg ±5 %
Dimensions (w × h × d)	(100 × 72 × 60) mm

ORDERING INFORMATION

RRAS-SVC/A11	RRAS-SVC/A11 unit, WAGO connector counterpart, Certificate of product quality and completeness, Routine test protocol, Insulation test protocol
---------------------	--

RECOMMENDED DRAWING SYMBOL

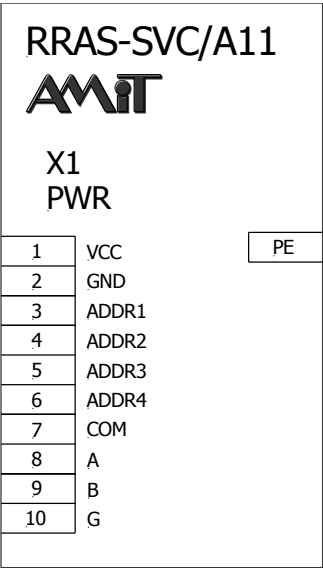

MECHANICAL DRAWING

